



广东富山科技股份有限公司
GUANGDONG FUSHAN TECHNOLOGY CO.,LTD
股票代码 Stock No. 870423


广东富山科技股份有限公司 GUANGDONG FUSHAN TECHNOLOGY CO.,LTD

地址：中国广东省中山市东凤安乐工业区 8 号
国内 (Domestic): www.fushan.cn
国外 (Overseas): www.zsfushan.com

电子邮件 (E-mail): sales@fushan.cn
电话 (Tel): +86-760-22610338
传真 (Fax): +86-760-22610328
电子邮件 (E-mail): Service@fushan.cn

全球售后服务热线
Global after-sales service hot line
400-6039338

售后服务中心
Service center
+86-760-22610338,ext 138



公司官网
Website



电子画册
E-catalog



H5

磨边机设备 Edging machinery | 钢化炉设备 Tempering Furnace
智能与环保设备 Intelligent&Enviromental protection machinery

始创 SINCE

1988

THE FAMOUS TRADEMARKS
OF GUANGDONG PROVINCE
广东省著名商标



公司简介

广东富山科技股份有限公司创建于一九八八年，占地面积五万多平方米，能独立设计开发和研制生产具有国际先进水平的玻璃深加工设备。是从事建筑、太阳能、家电、家具、汽车玻璃等行业的一站式合作伙伴，能为客户提供专业的整套设备解决方案。

公司具有雄厚的技术实力和精良的加工设备，并与多家大学和科研院所长期合作，开发应用先进技术，不断提高产品档次，引领市场需求。30 年来一直专注于玻璃深加工设备的研发、制造，其中多项技术获得国家及国外技术专利，填补国内空白，并有多个产品的开发获得科技进步奖项。目前公司主要产品有：N3CFBT 系列强制对流平 / 弯钢化玻璃生产线、FT 系列辐射平 / 弯钢化玻璃生产线、汽车双曲面玻璃生产线、夹层玻璃生产线、切割线、后视镜磨边生产线、高端无链条结构磨边机、快速双边磨、高速四边磨以及其他各类磨边机、钻孔机、清洗机以及喷砂机。

公司是国内同行业首家通过 ISO9001 国际质量体系认证和 CE 欧洲安全认证的企业，并严格遵循以顾客为中心，以优良的产品和完善的技术服务赢得了广大客户的信赖和支持。产品畅销海内外 100 多个国家和地区。富山品牌一直被评为“广东省著名商标”称号，公司连续多年被评为“高新技术企业”。

2017 年，公司成功登陆新三板，打开了资本市场的大门。未来，公司将充分利用资本市场的力量，继续规范运作、加大研发投入、完善资本结构，并开拓融资渠道，实现快速健康发展，为行业发展作出应有的贡献。

ABOUT COMPANY

Guangdong Fushan Technology Co., Ltd was founded in 1988, covering an area of more than 50,000 sqm, independent in research and development of design with the international advanced level of production of glass deep-processing equipment. It's your ideal cooperation partner of one stop solution for architectural, solar, home appliances, furniture as well as automotive glass, providing customer full professional solutions for all related machines

Fushan has powerful technical and excellent processing equipments and with a number of universities and research institutes for long-term cooperation, for development and application of advanced technology, and continuously improve product quality, leading the market demand.

Fushan has been focusing on glass deep-processing equipment more than 30 years, possessing numbers of national and foreign patents, and has accessed to multiple products development and technological progress awards. The main products as following: N3CFT series Forced Convection Flat/Bend Glass Tempering furnace, FT series Radiation Flat/Bend Glass Tempering furnace, Automotive Double Curved Glass Tempering furnace, Automatic Flat Glass Laminating line, Full Automatic Shape Glass Cutting Line, Silvering Glass Production Line, Full Automatic Glass Double Edging Line, Bearing Structure Conveyor Edging machine, High-speed Glass Seaming machine and All kinds of Edging machines, Drilling machine, Washing machine and Sand Blasting machine...etc.

Fushan is the first achiever of ISO9001 International Quality system certification and CE European safety certification of enterprises in the industry in China and strictly follow customer as the center, with excellent products and perfect technical services has won the trust and support from customer, products sales exported to more than 100 countries worldwide. Fushan has been assessed as "High-tech Enterprises" for many years.

Fushan successfully listed on NEEQ of China(National Equities Exchange and Quotations, similar to NASDAQ) in 2017, which means Fushan entering the Chinese stock market. In the future, the company will fully use the power of stock market, continue to standardize the operation, increase R&D investment, improve the capital structure, and develop financing channels to achieve rapid and healthy development, make more contribution for the industry developing.



先进的专利技术, 为您提供一站式解决方案

PROVIDE YOU ONE STOP SOLUTION BY ADVANCED PATENT TECHNOLOGY

富山科技产品线齐全, 多项生产技术获得中国和外国专利, 节能耐用; 通过 ISO9001 国际质量体系认证和 CE 欧洲安全认证。

Fushan technology with full range product line, several Production Technology achieved Chinese and Overseas Patent, Energy Saving and With Long Duration; With ISO9001 International Quality System and CE certification.

经验丰富, 实力宏厚

WITH RICH EXPERIENCE AND STRONG TECHNOLOGY

富山 30 年专注于玻璃机械设备的生产和供应, 丰富的玻璃深加工设备设计和生产经验。

Fushan has been focusing on producing and supplying glass machinery equipment more than 30 years with rich design and production experience for glass machinery equipment.

高素质专业团队

WITH HIGH QUALITY PROFESSIONAL TEAM

富山的技术和生产团队以“精品战略”为导向, 以“追求卓越, 走向世界”为目标。Fushan Technical and Production Team has been guiding by “Quality Strategy” and targeting by “Keep Improving, Word Viewing”.

可靠性高, 节能耐用

WITH HIGH RELIABILITY, ENERGY-SAVING AND DURATION

综合国内、外先进技术开发研制, 节能环保, 稳定高效。

With Comprehensive domestic and foreign advanced technology development, energy saving, environmental protection, high stability and efficiency.

国内客户 (Domestic): +86-13802656479

国外客户 (Overseas): +86-13822790889

电子邮件 (E-mail): sales@fushan.cn

传真 (Fax): +86-760-22610328

售后服务中心 (Service center): +86-760-22610338-138

电子邮件 (E-mail): Service@fushan.cn


企业文化 company culture

以人为本 / 创新求精 / 守法诚信 / 节能降耗

People-Oriented/Innovative Refinement/Law-Abiding and Trustworthiness/Energy-Saving



Enterprise honor 企业荣誉

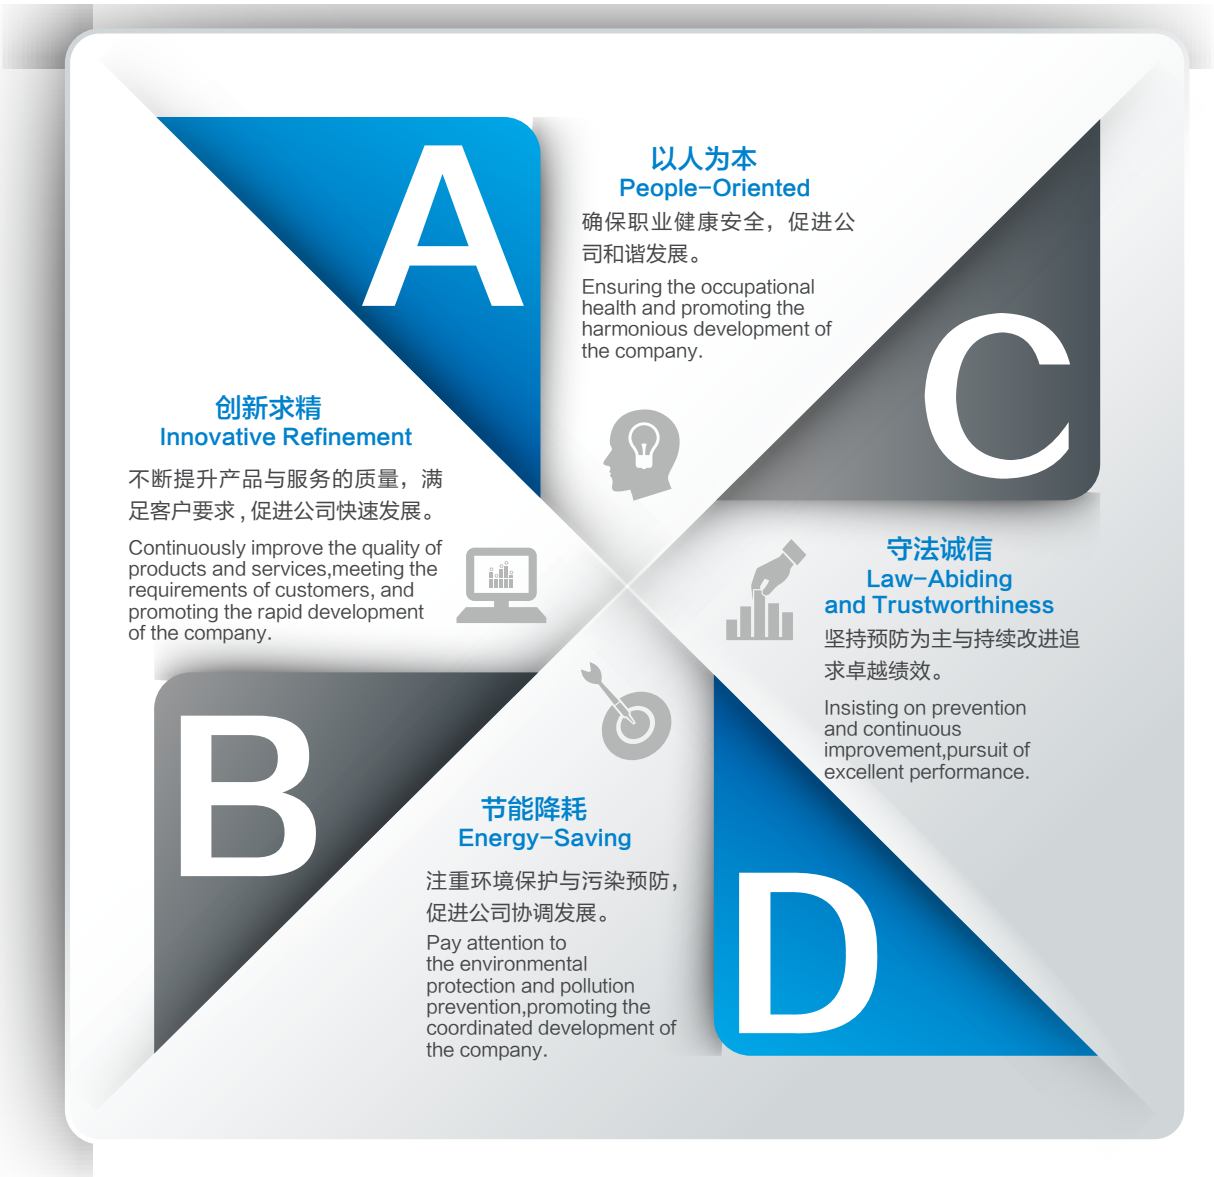

一站式合作伙伴

Your cooperation partner for one-stop solution



广东省著名商标




FSM20D


玻璃直线双边磨边机 Glass straight-line double edging Machine




玻璃直线双边磨边机组生产线 /
Glass straight-line double edging line

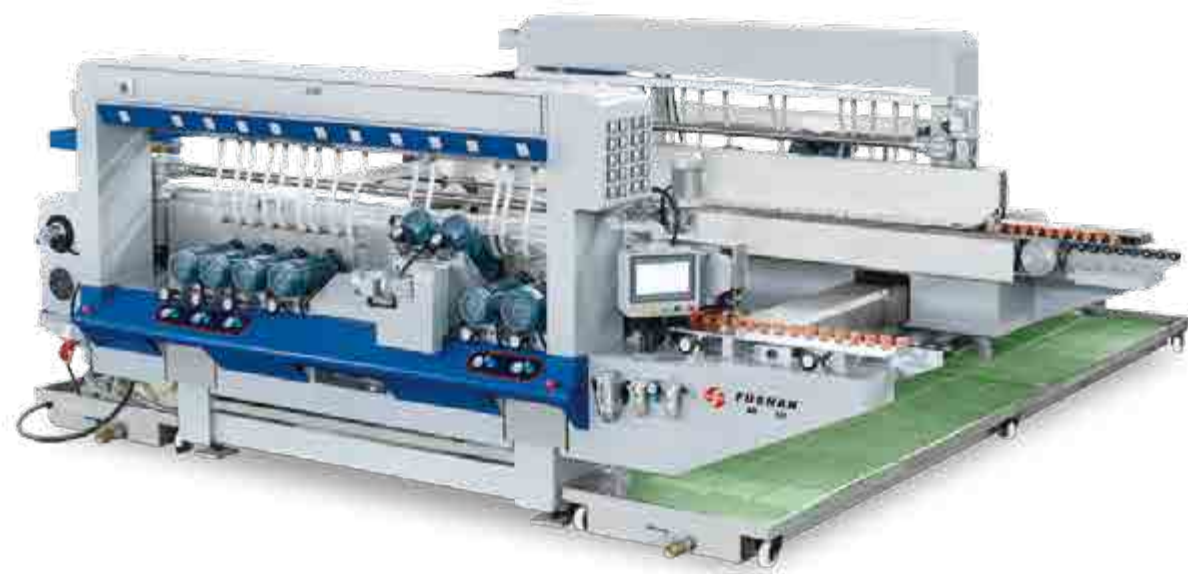

● FSM22D

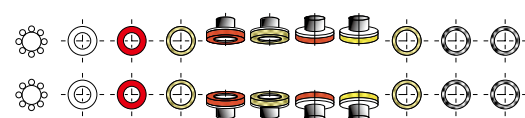

● FSM20D 磨轮配置示意图

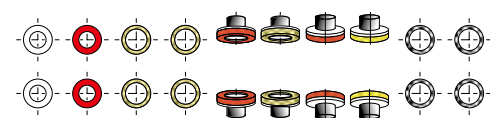

●性能特点

双边磨宽度标准型号分别是 2.6 米、3 米、4.2 米、4.5 米，也可按客户要求订做！

FSMD/FSMK 型为滚珠丝杆传动结构，FSMG 型为齿条传动结构。

FSMK 型快速开合速度达到 4.5 米 / 分钟，FSMG 型开合速度达到 12 米 / 分钟。升降部分采用导柱丝杆导向，抛光磨头采用双滚针轴承结构。

●Performance characteristics

The standard width of the double edger are 2.6m、3m、4.2m、4.5m,also we can offer the special width model under the customer's requirement. Model FSMD/FSMK is ball screw transmission structure, FSMG is gear rail transmission structure. Model FSMK fast open-closing speed can reach 4.5m/min, while model FSMG can reach 12m/min. The lifting section use linear guide rail, the polishing spindle use double needle bearing structure.

FSM20D	0.8 ~ 6.5	240 ~ 3000	3 ~ 25	53	5300x5350x2200	8000
FSMK20D	0.8 ~ 10	240 ~ 3000	3 ~ 25	53	5300x5350x2200	8000
FSMG20D	0.8 ~ 16	240 ~ 3000	3 ~ 25	53	5300x5350x2200	8000



● FSM2042D
直线双边机

● FSLT4230A
L 型转台 Transfer tble

● FSM20D
直线双边机

30 专业品牌
Praise by profession
年 YEARS

专注玻璃机械设备的研发和生产
Focus on the research and development
and production of glass machinery

●性能特点



该机组由一台玻璃直线双边磨边机 FSM2042D（20 磨头），一台 FSLT4230A 型转台和一台 FSM20D 玻璃直线双边磨边机组成，是大批量建筑和家具玻璃磨边生产的最佳配套设备。

●Performance characteristics

This product is consisted of one FSM2042D straight line double edger with twenty wheels, one "L" shape FSLT4230A transfer table and one FSM20D straight line double edger with twenty wheels, It is the best matched equipment of large batch of furniture and building glass edge production.

FSM1015D

小型双边磨全自动连线 Full automatic small size double edging line

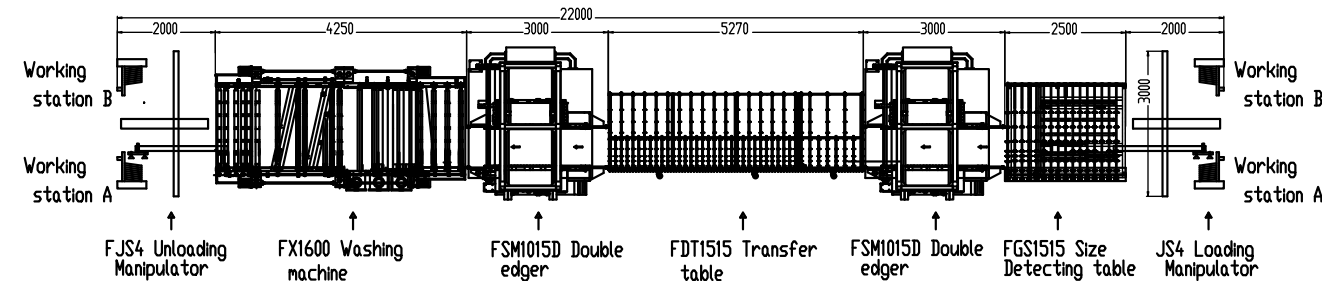

●性能特点

该机由一台 FJS4 上片和一台下片机机械手，一台 FGS1515 玻璃自动检测台，两台 FSM1515D 玻璃直线双边磨边机，一台 FDT1515 直线中转台和一台 FX1600 清洗机组成。实现了玻璃自动上片，检测，磨削和清洗。是电子玻璃，家具玻璃的最佳配套设备。


● Performance characteristics

The line consisted of 1 set FJS4 loading and 1set unloading manipulator, 1set FGS1515 Glass size automatic detecting table, 2 sets FSM1515D Double edger, 1set FDT1515 Transfer table and 1set Glass washing machine, which realized the automation of glass loading, size detecting, grinding as well as glass washing. It's ideal matched equipment for electronic glass, home appliance glass.

FSM1015D							
FSM1015D	1500x1500	80x80	0.5~10m/min	3~12	24kW	3060x2860x1750	2500

FXM471

Glass straight-line bevelling machine 玻璃直线斜边磨边机

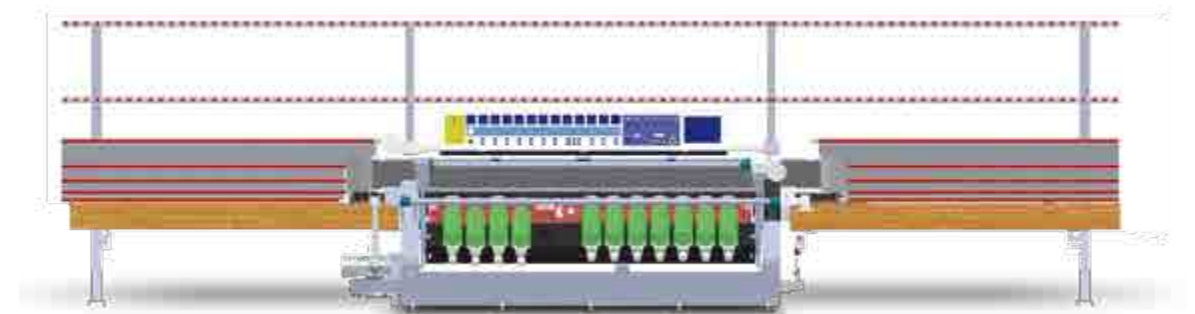


● FXM471

●性能特点

采用无链条轴承滚动链板结构，且后梁升降系统，磨头采用斜边电机拖板结构，有专门的气动抛光拖板，摆梁整体进给结构。电气采用 PLC 控制，人机界面操作显示玻璃厚度，斜边宽度及角度，剩余玻璃厚度以及加工速度。该机适用于加工不同斜边宽度要求的玻璃，该机型粗磨、精磨、抛光于一体，产品一次加工完成。经加工的玻璃制品的斜面表面光洁程度达镜面水平，斜面与上平面的交线平直，各角处两斜面的交线平直并均分各角，适用于加工质量要求严的制品，如高档镜片。

●Performance characteristics

Adopting the chainless bearing conveyor pad structure, and with back beam lifting system and special polishing sliding spindle, with swing beam feeding structure. The electric controlling system by PLC, with touch screen to show glass thickness, bevel width and angle, remaining thickness and speed as well. This machine is suitable for processing different bevel width, the rough grinding, fine grinding and polishing can be processed in one time. The processed glass bevel surface can reach the same as original mirror surface effects. The bevel is in parallel with top flat surface, the diagonal line is straight and average. the machine is very suitable for high quality request products, such as high level mirrors.



30 专业品牌
Praise by profession
YEARS
专注玻璃机械设备的研发和生产
Focus on the research and development and production of glass machinery

FXM471								
FXM471	0.6 ~ 4.4	60	3° ~ 45°	30x30	3 ~ 19	29	8300x1550x2250	5200

FXM261P/FXM261DII

玻璃直线斜边磨边机 Glass straight-line bevelling machine

● FXM261P



● FXM261DII



●性能特点

采用链条链板传动，适用于加工各种平板玻璃或镜片的斜边及底边，且前梁可升降，适合磨削小片镶嵌玻璃和玻璃马赛克，D型具有玻璃厚度、边宽、角度、速度等数字显示，P型有PLC自动控制系统，并用触摸屏作为人机界面。

●Performance characteristics

Chain transmitting, suitable for bevelling and edging various flat glass and mirror, Using up & down structure of front-beam. Suitable for grinding small size mosaics model D is electric controlled with LED displaying thickness, bevel width and angle, working speed. Model P with PLC control system with touch screen human-machine interface.



玻璃马赛克 MOSAIC GLASS



FXM261P	0.6 ~ 6	40	3° ~ 45°	25x25	3 ~ 19	22	8100x1100x2000	4000
FXM261DII	0.6 ~ 6	40	3° ~ 45°	25x25	3 ~ 19	22	8100x1100x2000	4000

FXM251P/FXM251DII

Glass straight-line bevelling machine 玻璃直线斜边磨边机

● FXM251DII




●性能特点

采用链条链板传动，进口优质磨头电机，适用于加工各种平板玻璃或镜片的斜边及底边。

D型具有玻璃厚度、边度、角度、速度和累计加工量等数字显示，P型有PLC自动控制系统，并用触摸屏作为人机界面。

●Performance characteristics

Chain transmitting with high quality spindles, suitable for bevelling and edging various flat glass and mirror, Model P with PLC control system with touch screen human-machine interface. while model D is semi-automatic with LED displaying thickness, bevel width and angle, working speed and finished meters.



30 专业品牌
Praise by profession
YEARS

专注玻璃机械设备的研发和生产
Focus on the research and development and production of glass machinery

FXM251P	0.6 ~ 3.0	30	3° ~ 45°	120x120	3 ~ 20	16.8	7670x1250x2520	3800
FXM251DII	0.6 ~ 3.0	30	3° ~ 45°	120x120	3 ~ 20	16.8	7670x1250x2520	3800



建筑 Architectural

太阳能 solar

家电 Home appliances

家具 Furniture

汽车玻璃 Auto Glass



12/13

FXM351D-II

玻璃直线斜边磨边机

Glass straight-line bevelling machine




●性能特点

采用链条链板传动，高档优质电机，适用于加工各种平板玻璃或镜片的斜边及底边。D 型具有玻璃厚度、边度、角度、速度和累计加工量等数字显示，P 型有 PLC 自动控制系统，并用触摸屏作为人机界面。

●Performance characteristics

Chain transmitting with high quality spindles,suitable for bevelling and edging various flat glass and mirror,Model P with PLC control system with touch screen human-machine interface.while model D is semi-automatic with LED displaying thickness,bevel width and angle,working speed and finished meters.



30 专业品牌
Praise by profession
YEARS
专注玻璃机械设备的研发和生产
Focus on the research and development and production of glass machinery

PXM351D-II									
0.6 ~ 6	40	3° ~ 45°	125x125	3 ~ 19	22	8100x1100x2000	4000		

FJM10-45

玻璃直线多级边磨边机

Glass straight-line Angle-changing edging machine




●性能特点

采用无链条轴承滚动链板结构，电气采用 PLC 自动控制，触摸屏作为人机界面，并能显示玻璃厚度、多级边角度和加工速度等各种参数。适用于加工各种平板玻璃直线平底边、多级边及棱角；且同时加工直线平底边多级边及棱角。

●Performance characteristics

Joint-Link adopts chainless ball bearing structure, PLC control with touch screen human-machine interface.which also displays the glass thickness, cutting-angle and working speed. Suitable to make straight-line edging, various cutting angle with arris in a single passage.




FJM10-45									
0.6 ~ 3.0	0° ~ 45°	90x90	3 ~ 30	23	8200x1200x2800	5800			

玻璃直线磨边机 Glass straight-line edging machine




- Performance characteristics

- **FZM10P**



Glass straight-line edging machine 玻璃直线磨边机



- Performance characteristics

●FZM9325P(PLC 触摸屏)


16/17 <<<

FZM9325B

玻璃直线磨边机 Glass straight-line edging machine



30 专业品牌
Praise by profession
YEARS
专注玻璃机械设备的研发和生产
Focus on the research and development and production of glass machinery



●性能特点

该机采用链条传动，适用于平板玻璃的平底边、45° 边及倒角磨削。粗磨、细磨、精磨、抛光一次完成。

●Performance characteristics

Chain transmitting, suitable to grind and polish flat edge, 45° edge cutting and arrises, Rough/fine edging/mitering and polishing finish in one single passage.



FZM9325B						
	1.0 ~ 5.0	150x150	3 ~ 25	18	7100x1050x2250	3000

FZ125/FZ125P

Glass Drilling machine 玻璃套料钻孔机

●FZ125 (手动控制 Manual Control)



●FZ125P (自动控制 Automatic Control)



●性能特点

FZ125P 全自动卧式钻孔机是我公司最新研发的产品。通过 PLC、编码器控制，实现上下钻自动进给，并具有红外线定位功能。配有带预定位装置的气动工作台。用手支撑大面积平板玻璃，特别适合批量平板玻璃的钻孔加工。FZ125 型上钻为手动控制。

●Performance characteristics

FZ125P Horizontal automatic drilling machine is a new product of our company. The top and bottom drill bits with infrared ray positioning function is controlled by the PLC and encoder and can automatically fall and rise. Pneumatic working table with pre-positioning function is used to support big size glass sheet. Model FZ125 top drill works manually.



缓冲钻孔 Hydraulic cushion drilling
激光定位 Laser positioning

FZ125P						
	3 ~ 50	4	130 (220)	2.45	2500x2700x1720	1000

FD20/FD21A

单臂异形斜边 / 周边两用机
Single-arm shape bevelling/edging machine

● FD20

磨头结构: 电机直接带动磨轮
Spindle structure: Motor+wheel directly



● FD21A

磨头结构: 电机通过专用磨头后带动磨轮
Spindle structure: Motor+special spindle+wheel



30 专业品牌
Praise by profession
YEARS
专注玻璃机械设备的研发和生产
Focus on the research and development and production of glass machinery

● 性能特点

适用于加工各种平板玻璃的异形周边。气动控制磨头的升降，粗、精磨轮及抛光磨轮转换方便快捷。

● Performance characteristics

Suitable to process peripheral edge of different shape glass. Pneumatically controlled wheels move up/down vertically.

FD20	2100	150	0° ~ 45°	40	3 ~ 40	2.8	r=1.6 h=2	1000
FD21A	2100	150	0° ~ 45°	40	3 ~ 40	2.8	r=1.6 h=2	1000

FDZ850

Full automatic glass drilling machine 全自动玻璃钻孔机



● 性能特点

本机器结构设计合理，工艺技术先进，操作调整方便，运行稳定可靠，制作精度、工作效率高。

本机器采用自动化操作（PLC 程序控制），工作过程均为气动压紧工件，数控进给刀具（上下钻可分别设定钻孔深度、速度），具有一次性定位完成孔径、倒角加工的功能。为了适应复杂工件多方位的制作加工，本机还独特地设计了定位装置，可以一次设置多个孔位进行加工。

本机适用于密集型、规格化、大批量、工艺技术要求高的大孔径多孔位的工件的高效制作。

● Performance characteristics

The machine is reasonable structural design, advanced technology, operation and easy adjustment, stable and reliable operation. It is precision and efficiency. This machine adopts the automatic operation (PLC program control), process are cylinder pressure workpiece, NC cutting tool (up and down drill can be set the drilling depth and speed), has the one-time in porous and a variety of different diameter processing, chamfer function. In order to adapt to the complex capable of the production process, this machine has unique design of position setting. It can be set many positions. This machine is suitable for intensive, standardized, large quantities of technology require the efficient production of high-porous work piece.

● 技术参数 SPECIFICATION

钻孔直径 Diameter of holes	Φ4-Φ250mm
钻孔厚度 Drilling depth	3~25mm
最大加工件 The maximum size of workpiece	1000x600mm
钻孔纵深 Drilling depth	850mm
钻轴数 The total number of spindles	2pcs (1set)
钻轴转速 Rotation speed of spindle	900~3000r/min
要求电源电压 Voltage	~380V/50HZ (3PH/4 Wire)
钻电机功率 Drilling motor power	2~1.5kW
X 轴 X-axis	600W
Y 轴 Y-axis	/
Z 轴电机功率 Z-axis motor power	2~13N.m
水泵 Water pump	1~450W
电机总功率 Total motor power	≈ 5kW
压缩空气压力 Pressure of compressed air	0.5~0.6MPa
工作台面离地面高度 Table height	820mm
台面尺寸 Table size	1000x600mm
整机重量 Weight	980kg
机器外形尺寸 Overall size	1800x1450x1680mm

FAM2000

全自动玻璃磨边机 Full automatic glass edging machine



为您提供完善的玻璃深加工技术解决方案
provide you with the perfect solutions of glass processing



●性能特点

FAM2000 全自动磨边机是一款通过处理 CAD 图纸后，并实现全自动加工的加工中心，广泛应用于平板玻璃的磨边和异形加工用：可磨边、倒角、抛光、磨内孔。调试操作简单、劳动强度低、精度可以控制在 0.1mm 以内。

外观简单整洁大方，大面积不锈钢设计，使机器免去锈迹的烦恼。由于双电机设计，磨边机可以实现一个电机装大磨轮，另一个电机装小磨轮，一次性将复杂的玻璃进行磨边加工，减少花片和报废率，提高成品率和效率。

● Performance characteristics

FAM2000 Full Automatic Glass Edging Machine through the CAD drawing to become automatic processing by CNC, widely used in the flat glass grinding and shaped processing, edging, beveling, polishing and inner edging. It is simple operation, low labor intensity, control accuracy within 0.1mm. The appearance is simple and elegant, large area of stainless steel design, reduce rusty trouble. As two motors design, one is for big wheel, one is for small wheel. Complex glass will be edged by one-time finished. Reduce scratch and scrap rates, improve product yield and efficiency.



●技术参数 SPECIFICATION

最大加工尺寸 The maximum size of workpiece	1700x800mm
加工厚度 Dilling depth	3-15mm
磨轴数 The total number of grinding axes	2PCS
磨轴转速 Grinding axes rotaion speed	300- 1800r/min
磨轴电机功率 Grinding axes motor power	2.2kW/5.5kW
X 轴进给电机功率 X-axis feed-in motor power	2kW
Y 轴进给电机功率 Y-axis feed-in motor power	2kW
Z 轴进给电机功率 Z-axis feed-in motor powor	2-1kW
真空泵 vacuum pump	4kW
水泵 water pump	750W
电机总功率 Total motor power	18.5kW
电源电压 Voltage	380V/50HZ
工作台面离地面高度 Table height	890mm
整机重量 Weight	2800kg
机器外形尺寸 Overall size	3600x2100x2400mm
电箱外尺寸 Electric-box overall size	1000x700x1800mm

30 专业品牌
年 YEARS
Praise by profession

专注玻璃机械设备的研发和生产
Focus on the research and development
and production of glass machinery



建筑
Architctural

太阳能
solar

家电
Home appliances

家具
Furniture

汽车玻璃
Auto Glass



22/23 <<<<

FX2600F

玻璃清洗机 Glass Washing machine



●性能特点

主传动为齿轮传动，变频调速，数字显示，清洗部、风干部整体升降，最大升程为：350mm, 便于清洗和保养。
三对毛刷（Φ150mm）配置，可洗 LOW-E 玻璃、普通镀膜和阳光镀膜玻璃。

●Performance characteristics


Main drive is by gear drive, inverter speed control and digital display. Washing section and drying section can be lifting up max. to 350mm as a whole, which is convenient to wash and maintain. The machine has three pairs of brushes (dia. 150mm), which can be used for washing LOW-E glass, ordinary coated and solar glass. The machine has two pairs of air knife heating system.

30 专业品牌
Praise by profession
年 YEARS
专注玻璃机械设备的研发和生产
Focus on the research and development and production of glass machinery

FX3000F	0-5	500 × 500	3000	3-25	3	35	6000 × 4200 × 2840	5500
FX2600F	0-7	400 × 400	2500	3-25	3	28	5500 × 3500 × 2840	4300
FX2000F	0-7	400 × 400	2000	3-25	3	28	5500 × 2900 × 2840	4120
FX1600F	0-7	400 × 400	1600	3-25	3	28	5500 × 2500 × 2840	3000

FX2600G/FX2600H

High-level Glass Washing machine 高端清洗机

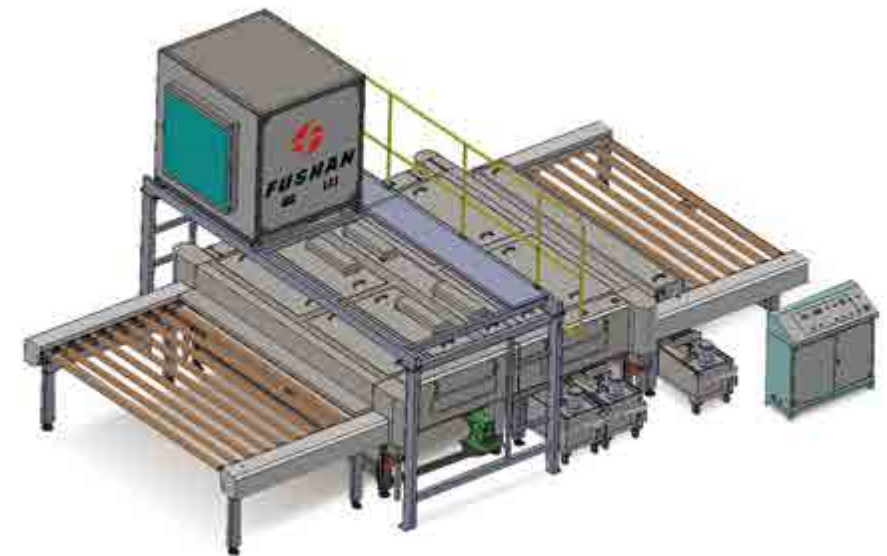

●性能特点

1、机架采用标准型材和铝合金组装而成，结构简单，外观实用，造型美观；凡与水接触的钣金件、机加件等配件均采用不锈钢材质；
2、输入段有不锈钢分隔式接水盘，前面6条输送胶辊浸泡入水中，后面四条胶辊处于预喷淋状态，上面的预喷水罩还装有隔风水刀，玻璃表面上的大部分污物在此段被预喷淋水冲走。下面是一个独立的水箱，水箱内的根据水质情况可循环使用。
3、FX2600G 型采用三级清洗机构，共配置3对毛刷，前面的一对硬毛刷可汽缸提升，后一对软毛刷可清洗 LOW-E 玻璃；FX2600H 采用四级清洗机构，共配置4对毛刷，前面的二对硬毛刷可汽缸提升，后二对软毛刷可清洗 LOW-E 玻璃；
4、传动采用齿轮传动，平稳可靠。输送利用变频调速，数字显示，控制方便。更有利于连接双边磨边生产线、中空玻璃生产线、安全玻璃生产线等。可选用 PLC 及触摸屏。
5、风刀结构先进，结构独特，FX2600G 型采用1台变频风机供风。配有一对直风刀和一对斜风刀，FX2600H 型采用2台变频风机供风。配有二对直风刀和一对斜风刀，当清洗 1300MM 宽度以下玻璃，风刀只使用前段，风机频率减小；大于 1300MM 玻璃时风刀全段使用，节能效果好。

●Performance characteristics

1、Frame with a standard profile and aluminum alloy have been assembled, simple structure, nice appearance, practical usage; All sheet metal parts contact with the water and other processed parts adopt stainless steel material;
2、Stainless steel water collecting device equipped in loading section, the front 6 rubber rollers soak into the water, the 4 rubber rollers behind is in the condition of pre-spray. The wind knife for water separating is equipped at the top, most of the dirt on glass surface was pre-spray washed away in this section. An independent water tank located at the bottom, the water can be recycled according the situation inside water tank.
3、Model FX2600G adopts three-stage cleaning mechanism, configuration with 3 pairs brush roller, a pair of hard brush roller ahead can be lifted up by cylinder, a pair of soft brush roller behind can clean Low-E glass; Model FX2600H adopt four-stage cleaning mechanism, configuration with total of 4 brush roller, the two pairs of hard brush ahead can be lifted up by cylinder, the two pairs of soft brush behind can clean Low-e glass;
4、Transmission adopts gear drive, stable and reliable. Transmission by frequency control, digital display, easy to control. More conducive to connect double edging line, double glazing line, and safety glass production line...etc. PLC and touch screen control is as an option.
5、With advanced and unique air knife structure, Model FX2600G use 1 set inverter blower for wind. Equipped with a pair of straight air knife and a pair of inclined air knife, Model FX2600H with 2 sets inverter blower for wind. Equipped with two straight air knife and a pair of inclined air knife, when washing glass width less than 1300 mm, only front section of air knife start using, blower frequency decreased; Glass size bigger than 1300 mm, the full section of wind knife will start using, with a perfect energy-saving effect.

FX2600G	2-12m/min	400 × 400mm	2600	3-25mm	3pairs	22	6800 × 4200 × 3320	4100
FX2600H	6-16m/min	400 × 400mm	2600	3-25mm	4pairs	22	7540 × 4200 × 33200	4500



建筑
Architectural

太阳能
solar

家电
Home appliances

家具
Furniture

汽车玻璃
Auto Glass



24/25

FBTC243615

水平辊道可逆式平弯钢化生产线
Horizontal roller hearth reversing flat&bent tempering line



●性能特点

- 1、炉体内腔采用进口优质保温材料，不易老化、变形、掉渣，既保证了钢化玻璃表面的光学效果，炉膛使用寿命也更长。
- 2、使用可靠性高、寿命长的炉丝，中间无焊点，炉丝不易烧断。
- 3、弯钢化段采用最适合玻璃成型的“过程同步成型”技术。
- 4、辊道支撑均采用特殊设计和工艺手段，所有辊道均可方便拆、装，整条生产线辊道面平整，且保证玻璃在整个钢化过程中不跑偏。
- 5、操作界面充分考虑对生产过程监视的直观和便捷，具有良好的人机界面。
- 6、合理的风机配置及高质量的炉体保温材料使设备耗电更低。

● Performance characteristics

- 1、Adopt super quality thermal insulation material inside of the furnace.It is not easy ageing,deformed,residue,Insure the optical result on the glass surface and continue the lifetime of the furnace.
- 2、To use long time and reliable heating elements without the welding spot in the middle and hard to burn-out.
- 3、Adopt synchronuous processing forming way technology for glass forming more suitable for the bent tempering section.
- 4、Adopt special design and process in roller support so that it is easy to dismantle, assamble and the whole line is even and no drift during the tempering process.
- 5、Has excellent human-machine interface.
- 6、Reasonable fan collocate and high quality thermal insulation material for less power consumption.

FBTC/FBTL 系列水平辊道式平 / 弯钢化机组技术参数表

Parameters of FBTC/FBTL Series Horizontal Roller Hearth Flat/Bent Glass Tempering Furnaces

炉体类型 The Furnace type	型号 Type	平钢化最大规格 Flat Max. Size(mm)		弯钢化最大规格 Bent Max. Size(mm)		平钢化产量 Flat Productivity	弯钢化产量 Bent Productivity	平钢化最小规格 Flat Min. Size(mm)		弯钢化最小规格 Bent Min. Size(mm)	弯钢化最小半径 Min.Radius	平玻璃厚度范围 Thickness Range (mm)	弯玻璃厚度范围 Thickness Range(mm)	装机功率 Installed power Capacity	设备尺寸 Overall Dimension (LxWxH)
		宽 (W)	长 (L)	宽 (W)	长 (L)	m²/h(5mm)	(load/h)	宽 (W)	长 (L)		mm			kW	
平弯辐射炉 Flat/Bent Radiation Furnace	FBTC122508	1250	2500	1250	850	38	30	150	300	200	350	4—19	3.5—12	370	14.45x2.6x3.3
	FBTC123608	1250	3660	1250	850	55	45	150	300	200	350	4—19	3.5—12	520	19.25x2.6x3.3
	FBTC152508	1500	2500	1500	850	48	30	150	300	200	350	4—19	3.5—12	460	14.45x2.9x3.3
	FBTC153608	1500	3660	1500	850	69	45	150	300	200	350	4—19	3.5—12	650	19.25x2.9x3.3
	FBTC182510	1800	2500	1800	1000	54	30	150	300	200	350	4—19	3.5—12	540	14.62x3.2x3.3
	FBTC183610	1800	3660	1800	1000	78	30—45	150	300	200	350	4—19	3.5—12	720	19.42x3.2x3.3
	FBTC202510	2000	2500	2000	1000	61	30	150	300	200	350	4—19	3.5—12	600	14.62x3.4x3.3
	FBTC203610	2000	3660	2000	1000	89	30—45	150	300	200	350	4 (h)—19	3.5—12	750	19.42x3.4x3.3
平弯对流炉 Flat/Bent Convection Furnace	FBTC243615	2400	3660	2400	1500	110	30	150	300	200	350	4 (h)—19	5—12	810	19.93x3.8x3.3
	FBTC245010	2400	5000	2400	1000	150	45	150	300	200	350	4 (h)—19	4—12	1020	24.7x3.8x3.3
	FBTC243620	2400	3600	2400	2000	110	15	150	300	200	500	4 (h)—19	5—12	840	20.66x3.8x4.5
	FBTC243625	2400	3600	2400	2500	110	15	150	300	200	500	4 (h)—19	5—12	880	21.1x3.8x4.5
	N3CFBTC243612	2400	3660	2400	1200	122	30	150	300	200	350	4 (h)—19	4—12	820	19.59x4.0x3.3
	N3CFBTC243615	2400	3660	2400	1500	122	30	150	300	200	350	4 (h)—19	5—12	810	19.93x4.0x3.3
	N3CFBTL243630	2400	3600	2400	3000	122	16	150	360	300	500	4 (h)—19	5—12	840	22.16x4.0x4.4
	N3CFBTL244239	2400	4200	2400	3900	140	16	150	360	300	500	4 (h)—19	5—19	950	25.31x4.0x4.4
	N3CFBTL245039	2400	5000	2400	3900	166	16	150	360	300	500	4 (h)—19	5—19	1055	28.25x4.0x4.4
	N3CFBTL246039	2400	6000	2400	3900	200	16	150	360	300	500	4 (h)—19	5—19	1200	32.57x4.0x4.4
	N3CFBTL285439	2800	5400	2800	3900	206	16	150	360	400	600	5 (h)—19	6—19	1280	30.81x4.36x4.5

注：以上仅为我公司生产的常规型号，如有特殊需求，可按客户需求特制。
Note:The above sizes are the normal ones,we can design tempering line according to your special requirements.



N3CFT2036

Flat tempering line 水平钢化炉



●质量优良


- 整体平整度 <1.5mm/1000mm
- 局部平整度 <0.1mm/300mm
- 颗粒度符合 DIN EN 12150 标准 (>=40pieces in 50x50mm)
- 表面无斑痕

- 面易于维护保养
- 强大的技术支持
- 生产过程数据及图形监控
- 操作简单、培训全面

● High Quality

- Overall flatness deviation<1.5mm/1000mm
- Loceal faltness deviation<0.1mm/300mm
- Breaking pattern according to DIN EN 12150 (>=40piecesin 50x50mm)
- No visible scratches or marks on surface

- Easy maintenance
- Competent support and help
- Overview of production figures
- Easy operation and solid training

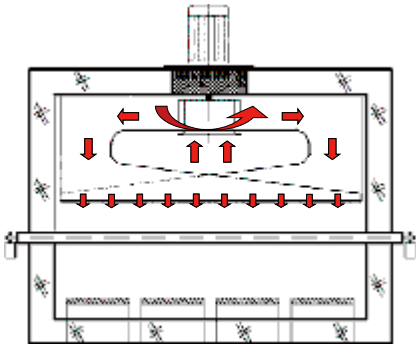

●对流系统 Convection system

FT2442 水平钢化炉 技术参数表 Flat Tempering Line

炉体类型 The Furnace type	型号 Type	最大玻璃尺寸 Max.Glass Size(mm)		最小玻璃尺寸 Min.Glass Size(mm)		产量 Productivity	玻璃厚度范围 Thickness Range (mm)	装机功率 Installing power	设备外形尺寸 Overall Dimension(LxWxH)
		宽 (w)	长 (L)	宽 (w)	长 (L)	m²/h(5mm)		kW	米 /m
水平辐射炉 Flat Radiation Furnace	FT1225	1200	2500	150	300	38	4—19	355	12.97x2.6x3.1
	FT1525	1500	2500	150	300	45	4—19	460	12.97x2.9x3.1
	FT1536	1500	3600	150	300	69	4—19	650	17.77x2.9x3.1
	FT1825	1800	2500	150	300	54	4—19	510	12.97x3.2x3.1
	FT1830	1800	3000	150	300	65	4—19	630	15.37x3.2x3.1
	FT1836	1800	3600	150	300	80	4—19	730	17.77x3.2x3.1
水平对流炉 Flat/Bent Convection Furnace	FT2030	2000	3000	150	300	73	4—19	700	15.37x3.4x3.3
	N3CFT2036	2000	3600	150	300	98	4H—19	670	17.77x3.6x3.3
	N3CFT2436	2400	3600	150	300	122	4H—19	780	17.77x4.0x3.3
	N3CFT2448	2400	4800	150	300	166	4H—19	1020	23.05x4.0x3.3
	N3CFT2460	2400	6000	150	300	200	4H—19	1210	27.37x4.0x3.3
	N3CFT3060	3000	6000	150	300	246	5H—19	1330	26.9x4.6x3.3



26/27

FJE2600

夹层玻璃生产线 Flat glass laminating line



为您提供完善的玻璃深加工技术解决方案
provide you with the perfect solutions of glass processing

技术参数	Specification		FJ2200	FJ2600	FJ2800	FJ3300
最大加工宽度	Max.working width	mm	FJE2200 2200	FJE2600 2600	FJE2800 2800	FJE3300 3300
最大玻璃长度	Max.glass length	mm	4000(A1)	6000(A2)	6000(A2)	6000(A2)
最小玻璃尺寸	Min glass size	mm	400 × 600	500 × 800	500 × 1000	500 × 1000
玻璃厚度	Glass thickness	mm	3 ~ 19	3 ~ 19	3 ~ 19	3 ~ 19
夹层玻璃最大厚度	Max thickness of laminated glass	mm	60	60	60	60
PVB 辊筒数	PVB rolls unit	Rolls	3(B)	3(B)	3(B)	3(B)
PVB 辅放及切割系统	PVB laying and cutting system		MANUAL OR AUTOMATIC 手动或自动			
产量 (单夹层)	Production capacity(single layer)	m ² /8h	800	1000	1300	1700
工作高度	Working height	mm	890 ± 30	890 ± 30	890 ± 30	890 ± 30
总功率 (不含高压釜)	Power (Without Autoclave)	kW	160	190	2300	2800


(A1)Optional 3200-4500mm (A2)Optional 4000-6000mm (B2)Optional 8-16
(A1) 可选范围 3200-4500mm (A2) 可选范围 4000-6000mm (B2) 可选择项 8-16
FJ 系列为国内最新设计 FJE 系列为欧版式设计
Serious FJ is the latest design in China Serious FJE is European design

●FSP2-3727



可选择 OPTION

●FJE2600

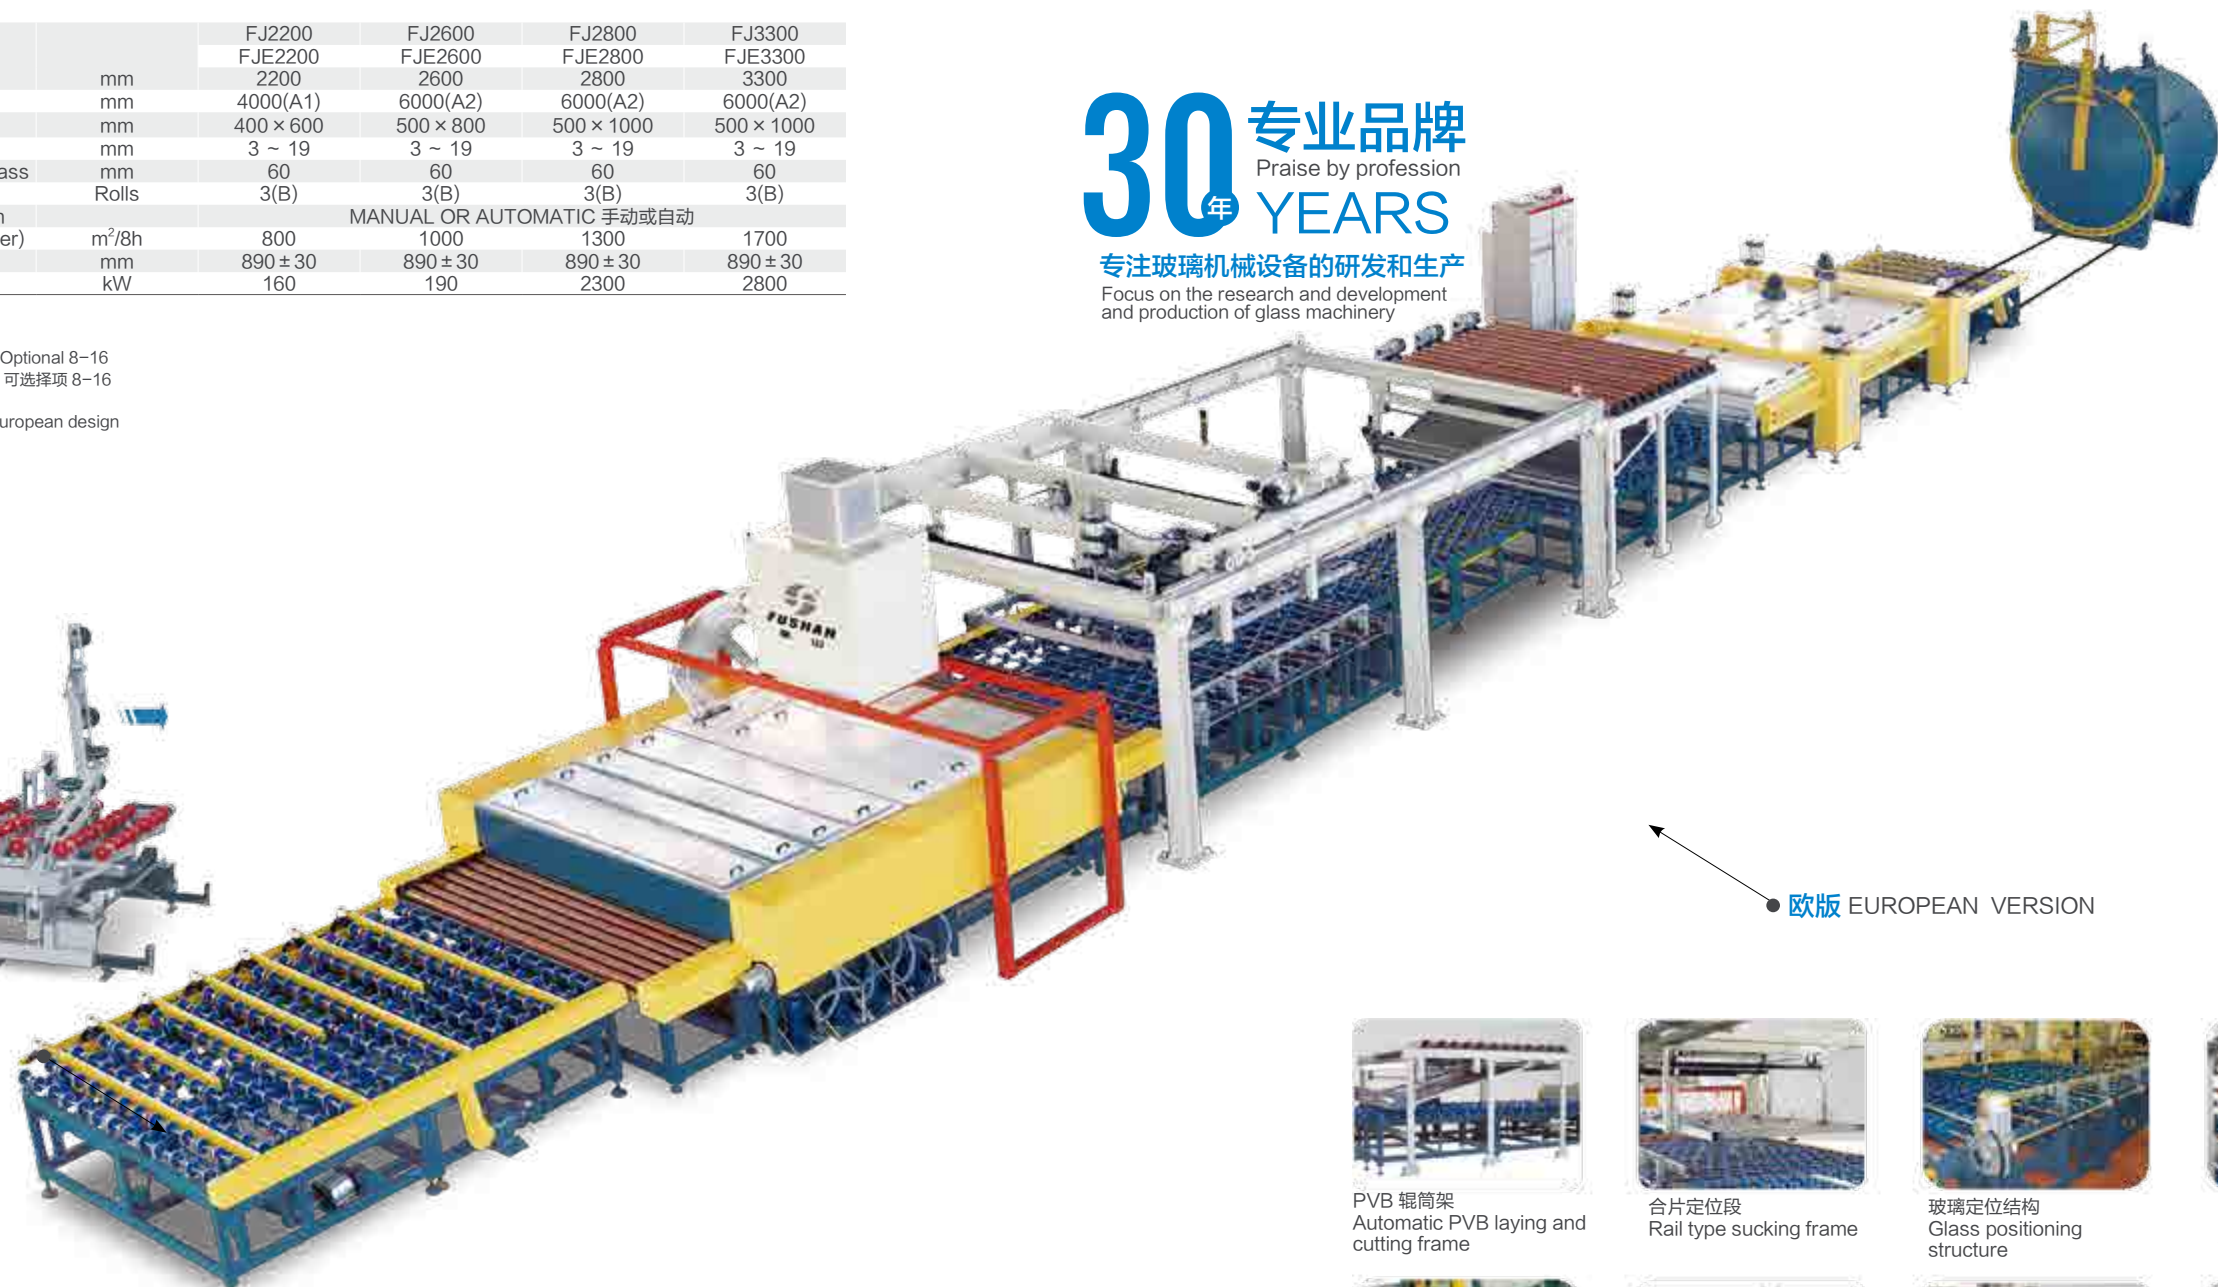

●欧版 EUROPEAN VERSION



PVB 辊筒架
Automatic PVB laying and cutting frame



合片定位段
Rail type sucking frame



玻璃定位结构
Glass positioning structure



合片无尘净化房
Assembling cleaning



液压翻转上片台
Oil-hydraulic rotary loading table



预压段
Pre-pressing machine



压辊独立传动 (需订做)
Independent transmission of pressing rollers(as option)



高压釜
Autoclave




FJJ2260

经济型夹层玻璃生产线参数 Economic Flat Glass Laminating line

FY4

Glass edging/modulate grinding machine 玻璃周边磨边机

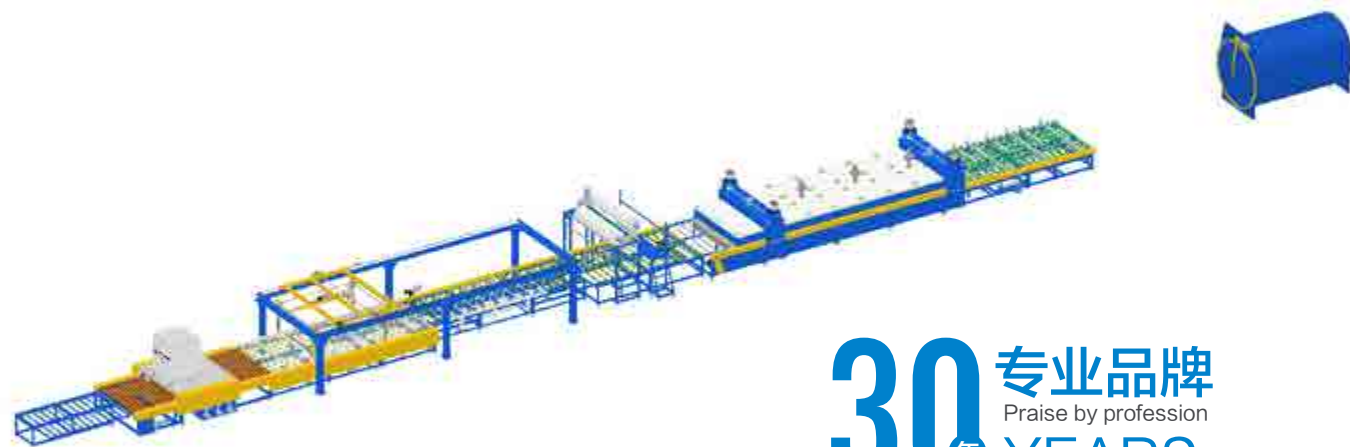


30 专业品牌
Praise by profession
YEARS
专注玻璃机械设备的研发和生产
Focus on the research and development and production of glass machinery

● 技术参数 SPECIFICATION

最大玻璃尺寸 Max glass size:(W 宽 × L 长)	2200 × 6000 mm
最小玻璃宽度 Min glass size:	400 mm
最小玻璃长度 Min glass length:	600 mm
玻璃厚度 Glass thickness:	4 ~ 19 mm
最大合片厚度 Max laminating panel thickness :	60 mm
PVB 滚筒数 Roller quantity:	3pcs
工作高度 Working height:	890 ± 30mm
总功率 Total power:	160kW (不含高压釜 Autoclave not included)
外形尺寸 Overall dimension: (L 长 × W 宽 × h 高)	36000 × 9500 × 3500mm (不含高压釜 Autoclave not included)
最大产量 Max Productivity:	60pairs /8h



后视镜客户工厂 FY4 连线细节
FY4 Machine using in customer's factory

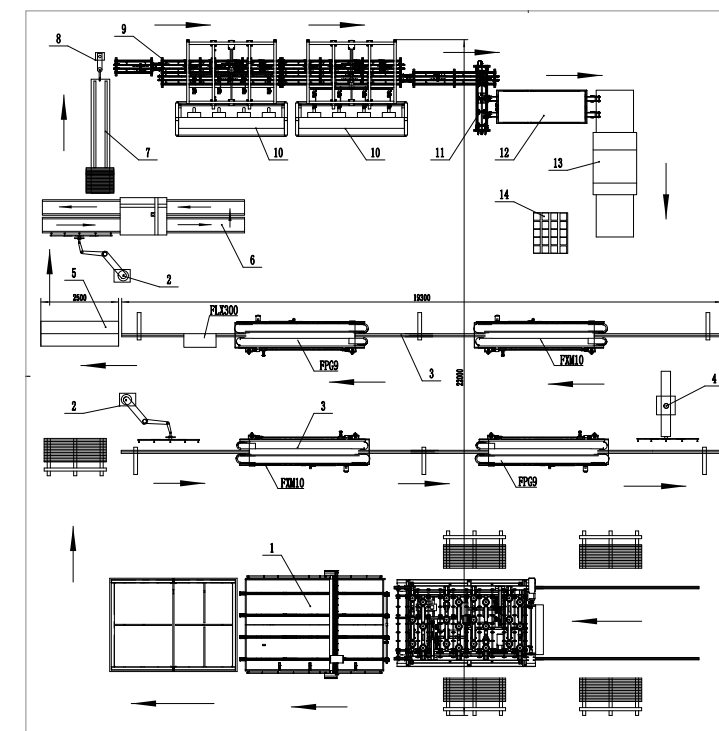


● 性能特点

该设备采用 PLC 自动化控制，使用真空吸附，能同时磨削四块异形小块玻璃的周边。且转台具有定位停和旋转规定圈数的功能，是汽车后视镜生产线的专用设备，也可用于加工各种小尺寸异形玻璃。

● Performance characteristics

The equipment adopt PLC control, with vacuum sucking and can grind 4 pieces small shape glass. The turning table with function of positioning and turning based on settings, is a specialized machine for rearview primaric mirror production and also suitable for all kinds of small size shape glass.

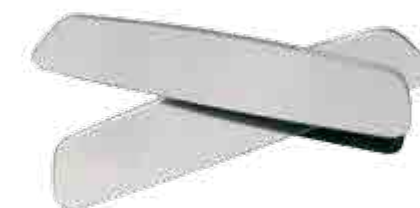

FY4	100 ~ 112	3 ~ 12	14.25	3600 × 1050 × 1900	3500
-----	-----------	--------	-------	--------------------	------



建筑
Architectural

太阳能
solar

家电
Home appliances

家具
Furniture

汽车玻璃
Auto Glass



30/31

FXM10+FPG9+FLX300

汽车后视镜磨边线 Rearview Prismatic mirror production line



Environmental protection machine 环保设备



● FLX300
Washing Machine

● FPG9
Bevel polishing Machine

● FXM10
Bevel Grinding Machine

●后视镜用户工厂
Prismatic mirror line using in customer factory



●性能特点

该生产线由一台斜边磨边机和一台斜边抛光机及一台玻璃清洗机组成。磨边机传动链板采用无链条轴承滚动结构，PLC 自动控制，液晶屏幕显示各种参数，能一次完成小角度、大斜面玻璃直线斜边的粗磨、精磨、抛光和清洗，是汽车后视镜生产的专用设备。

●Performance characteristics


The line consists of a beveling machine, a bevel polishing machine and a washing machine. The beveling and polishing machine adopts bearing structure pad conveyor, with PLC control and touch screen to display all parameters, the small angle, big straight bevel rough grinding, fine grinding and polishing as well as washing can be completed in single passage. It's a special equipment for automotive rearview mirror production.

30 专业品牌
Praise by profession
YEARS
专注玻璃机械设备的研发和生产
Focus on the research and development and production of glass machinery

● FXM10



● FPG9



FPG9+FXM10	0.4 ~ 4.4	75	1.8° ~ 25°	3 ~ 25	45	15350x1200x1800	9800
------------	-----------	----	------------	--------	----	-----------------	------


●低功率粉水处理机 FHB

Low power powder water treatment machine



●高效粉水处理机 FHB2

High efficiency powder water treatment machine

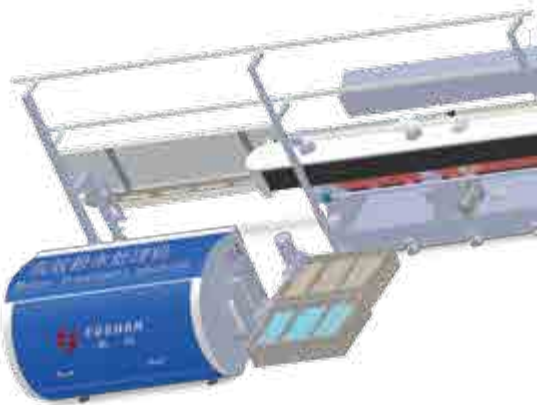

●性能特点

所选用的石材 / 玻璃污水处理设备不一样，处理的效果也不一样，成本有的甚至高的离谱。而一台高效固液分离机就能解决了石材玻璃生产污水处理过程的沉降、污泥脱水的过程。经过多年对石材玻璃污水处理的经验，可在操作过程中节省 50% 的运营成本。

●Performance characteristics

The different selection of sewage treatment equipment, the effect of the treatment is different also, high cost or even outrageous, but an efficient solid and liquid separator can solve the stone/glass production process of sewage treatment and sludge dewatering process. After years of stone waste water treatment experience, can save 50% of operating costs in the process of operation.

●废水专用高效固液分离机有着以下的特点：

- 1、使用面积小，一般只需要 6-8 个平米，安装简单方便。
- 2、效果极佳、工艺简单、密封性好，耐腐蚀性好，工作环境好，持续工作能力强，处理能力大。
- 3、使用成本相对较低，维修保养费用极低，维修简单。
- 4、脱泥量大，不需要清水冲洗，不会造成二次污染。
- 5、出水量大。

●The waste water treatment machine has following characteristics:

- 1、It occupies small space, normally only need 6-8 square meters, easy and convenient installation.
- 2、Excellent results, simple process, good sealing, good corrosion resistance, good working environment, long work ability, strong processing power.
- 3、With relatively low cost of using and low maintenance cost, simple maintenance.
- 4、With large desliming quantity, no need water flush, and will not cause secondary pollution.
- 5、With big water output.

● 技术参数 SPECIFICATION

机型 FHB Machine model	电机功率 (kW) Motor power			清洗水压 Washing pressure	清洗用水量 (L/h) Washing water volume	维护频度 Maintenance rate	易损件更换周期 (年) Worn parts change(Y)	
	旋压轴 Rotary axis	搅拌机 blender	合计 Total				旋压轴 Rotary axis	活动环 Flexible ring
131	0.1	0.1	0.2	0.1Kpa~0.2Kpa	24	5 分钟 / 天	1	1.5
201	0.4	0.4	0.8		64	5 min/day	3	1.5
301	0.4	0.4	0.8		40		3	1.5

机型 FHB2	转鼓直径 (mm)	转鼓长度 (mm)	最高转速 (RPM)	最大分离因素	处理能力 (m3/h)	主电机功率 (kW)	重量 (Kg)	外形尺寸 (mm)
220	220	1000	5400	4080	0.5-5	7.5	1000	2410 × 800 × 1080
350	355	1250	400	3180	1.0-10	15	1800	3185 × 840 × 1180
450	450	1350	3450	3000	3.0-25	18.5-37	3000	3674 × 1080 × 1385
580	580	2030	2780	2500	20-60	55-75	6200	4730 × 1270 × 1540



FYM8S/FZM10S

石材加工设备 Stone processing machine

FYM8S 全自动石材圆边机
Full Automatic Stone Pencil Edging machine



● 技术参数 SPECIFICATION

最小石材尺寸 Min stone size	150mm × 150mm
石材板面厚度 Stone thickness	3mm~60mm
传动速度 Transmitting speed	0.6m/min~3.0m/min
功率 Power	23kW
总质量 Weight	3500kg
外形尺寸 Overall dimension	L:7100mm × W:1000mm × H:2250mm

FZM10S 全自动石材直边机
Full Automatic Stone Edging Machine



● 技术参数 SPECIFICATION

最小石材尺寸 Min stone size	150mm × 150mm
底边最大磨削量 Max bottom edge grinding	3mm
后棱角最大磨削宽度 Max Back arris width grinding	15mm
石材板面厚度 Stone thickness	3mm~60mm
传动速度 Transmitting speed	0.6m/min~3.0m/min
功率 Power	24kW
总质量 Weight	3500kg
外形尺寸 Overall dimension	L:7500mm × W:1000mm × H:2250mm

● 性能特点

石材由进料导轨输送到履带式传动链，通过前梁同步加紧机构夹紧并传动石材进行磨削，磨削完成后传送到出料导轨输出。八个磨头用于圆边的粗磨、半精磨、精磨、抛光。

● Performance characteristics

Stone transmission by feeding guide to the caterpillar chain, the stone will be grinding by front beam synchronization to tighten clamping and transmission, it will be transmitted to output when grinding finished. 8pcs grinding spindles used for pencil edge rough grinding, half precision grinding, fine grinding, polishing .

● 性能特点

石材由进料导轨输送到履带式传动链，通过前梁同步加紧机构夹紧并传动玻璃进行磨削，磨削完成后传送到出料导轨输出。10 个磨头用于底边的粗磨、半精磨、精磨、抛光和后棱边的粗磨、精磨、抛光。

● Performance characteristics


Stone transmission by feeding guide to the caterpillar chain, the stone will be grinding by front beam synchronization to tighten clamping and transmission, it will be transmitted to output when grinding finished. 10pcs grinding spindles used for bottom rough grinding, half precision grinding, fine grinding, polishing and back arris rough grinding, fine grinding and polishing.



淋浴房玻璃生产线设备 /

The shower room glass production line equipment

● 淋浴房玻璃生产线专用设备 Shower room glass production line related equipment

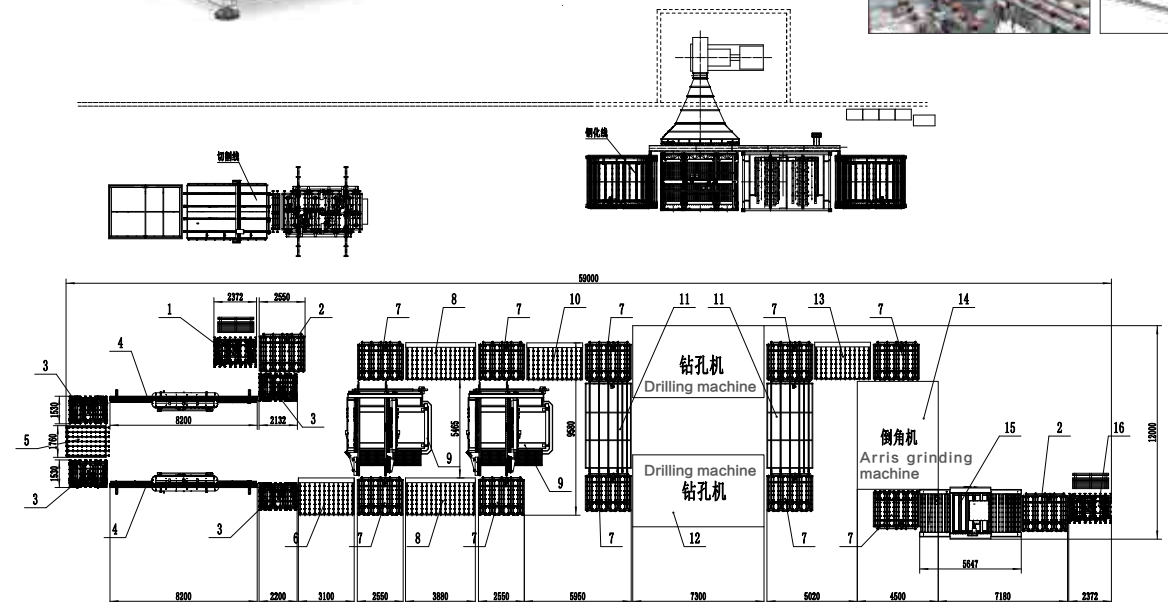

● 性能特点

该生产线是专业生产淋浴房玻璃的自动化连线，生产效率高。主要由上片台、对位台、翻转台、玻璃直线磨边机、过渡台、长度检测台、双边转换台、双边磨边机、宽度检测台、钻孔机、倒角机、清洗机以及下片台组成。

● 技术参数 SPECIFICATION

最大玻璃尺寸 The Max glass size	2200x1600mm
最小玻璃尺寸 The Min glass size	1500x300mm
玻璃厚度 Glass thickness	4-12mm
整线产能 The line productivity	2 片 / 分钟 (视具体方案定) 2pieces/min (depends on specific solution)

● Performance characteristics

This is a specialized full automatic production line for shower room glass, with high efficiency of productivity. It's consisted of loading table, position table, tilting table, straight-line edging machine, transition table, glass length detecting machine, double transition table, double edging machine, glass width detecting machine, drilling machine, arris grinding machine, washing machine and unloading table.



建筑 Architectural

太阳能 solar

家电 Home appliances

家具 Furniture

汽车玻璃 Auto Glass



34/35

FZP2500

全自动玻璃转片机 Full automatically glass transferring machine



●性能特点

该机能实现玻璃自动在线 90 度转向，配合立式直线磨边加工另外一边，替代人工来回搬转玻璃。全程操作采用 PLC 控制，变频调速。矩形、三角形、平行四边形玻璃均可翻转。自动转片中玻璃无损伤、无划痕，具有速度快、效率高、旋转平稳、质量可靠等特点，大大提高了生产效率。省人省力降成本、安全系数高，是智能化磨边流水线生产线的首选。


●Performance characteristics

This machine can be automatically rotated 90 degrees glass direction on line for next vertical edger processing another side, replace the people move and rotate it by hand. Adopt PLC control the whole processing, and with frequency control speed. Rectangular, triangular and parallelogram etc. shape glass all can be rotated. It's the best option for the intelligence edging machine line as without scratch and damage, fast speed, high efficiency, smooth rotation, reliable quality, save and reduce cost.

● 技术参数 SPECIFICATION

型号 Model	FZP2500
最大转片玻璃尺寸 Max.rotating glass size	2500x2500mm
最小转片玻璃尺寸 Max.rotating glass size	280x280mm
输送速度 Conveyor speed	0-16m/min
转片速度 Rotating speed	1.5-13S/PCS
工作高度 Working height	750 ± 50mm
装机功率 Installation power	3.7kW 380v
装机尺寸 Overall size	3.3mx1.2mx2.45m
重量 G.W	1800kg

● 全自动直边磨边连线 Full automatically glass edger line

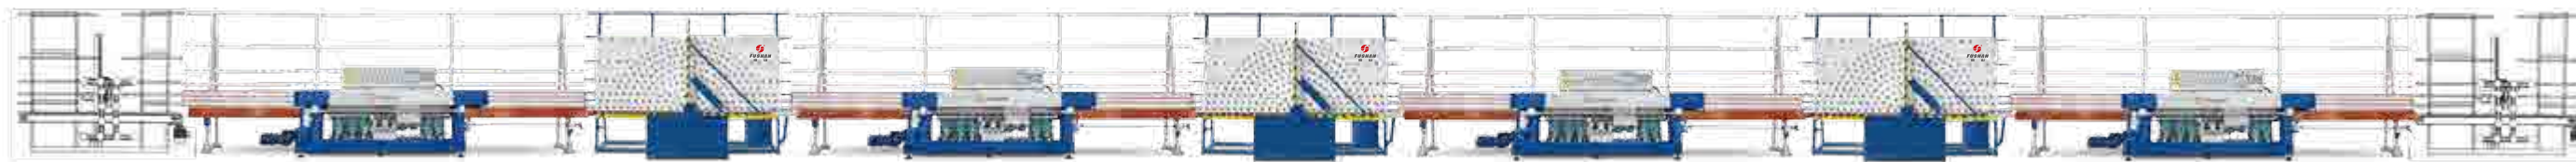

重量型玻璃上下片机械手

Heavy weight glass loading/unload manipulator



●性能特点

此系列机械手专为家具、门窗、建筑等大尺寸玻璃上下片设计，实现自动上下片，最大尺寸可达 2440x3660mm，最大提升重量可达 250kg，代替了效率低的人工上下片，极大的提高生产效率，且安全可靠，有效降低了安全事故的概率。
可根据客户现场生产情况量身定做生产线解决方案，最大程度满足客户各种工艺要求，实现智能化生产。

● 技术参数 SPECIFICATION

型号 Model	FJX1010	FJX1520	FJX2025	FJX2436
工作最大负荷 Maximum Loading	30kg	60kg	100kg	250KG
最大尺寸 Maximum Size	1000x1500mm	1500x2000mm	200x2500mm	2440*3660mm
重复定位精度 Position Accuracy	± 0.01mm	± 0.01mm	± 0.01mm	± 0.01mm
旋转轴 R axis	最高速度 Top Speed	60° /S	40° /S	25° /S
	最大行程 Max.Range	100°	100°	100°
左右轴 X axis	最高速度 Top Speed	700mm/S	700mm/S	700mm/S
	最大行程 Max.Range	2000m	2000m	2000m
前后轴 Y axis	最高速度 Top Speed	700mm/S	700mm/S	700mm/S
	最大行程 Max.Range	1200mm	1200mm	1200mm
升降轴 Z axis	最高速度 Top Speed	700mm/S	500mm/S	300mm/S
	最大行程 Max.Range	1500mm	1500mm	1500mm

备注：更多型号受篇幅限制未列尽，更多信息请咨询销售团队，将为提供个性化您定制方案

Note: Other models are not listed due to limited space,for further requirements, please contact our Fushan Sales Group.



图例 Legend

为您提供完善的玻璃深加工技术解决方案
provide you with the perfect solutions of glass processing

销售和服务网络

Sales and service network



	Peripheral Polishing w. 周边抛光轮		Max.glass size mm 最大玻璃尺寸
	Peripheral diamond w. 周边金刚轮		Min.glass size mm 最小玻璃尺寸
	Felt w. 羊毛轮 (毡轮)		Bevel angle 斜角
	Polishing w. with cerium 直边抛光轮		Bevel width mm 斜宽
	Polishing w. 精磨轮		Chamfer angle 斜切角
	Resin diamond w. 树脂轮		Max. glass size mm 最大玻璃尺寸
	Metal diamond w. 金刚轮		Min. glass size mm 最小玻璃尺寸
	Glass thickness mm 玻璃厚度		Max hole mm 最大孔径
	Precision mm 精度		Min hole mm 最小孔径
	Acceleration m/s² 加速度		Brushes 毛刷
	Speed m/min 速度		Min. emissivity value 最小辐射值
	Max. Working glass width mm 加工玻璃最大宽度		Max. bendin depth mm 最大弯深度
	Max. Working glass height mm 加工玻璃最大高度		Max. bent length mm 最大弧长
	Power kW 总功率		Minimum bending radius mm 最小弯半径
	Weight Kg 总重量		Dimensions mm 尺寸
			Dimensions mm 尺寸

