



TNT MANUFACTURING CO., LTD.

HAND TOOL - SOCKET SET (CR-V)

Product Feature

- * **PREMIER HAND TOOLS, SUITABLE FOR DAILY PROFESSIONAL USE**
- * **HEAT TREATED CHROME VANADIUM STEEL SOCKETS & ACCESSORIES**
- * **FULLY POLISHED BLACK CHROME FINISH**
- * **SUPPLIED IN METAL CARRY-CASE**

HT-2032 32PC 1/4"SQ DRIVE SOCKET SET- METRIC



SOCKET: 4,4.5,5,5.5,6,7,8,9,10,11,12,13,14MM
DEEP SOCKET: 4,4.5,5,5.5,6,7,8,9,10,11,12,13,14MM
EXTENSION BARS: 75MM, 150MM
RATCHET WITH QUICK RELEASE
UNIVERSAL JOINT
SPINNER HANDLE
3/8"SQ DRIVE- 1/4" SQ DRIVE MALE T-BAR ADAPTOR

HT-3034 34PC 3/8"SQ DRIVE SOCKET SET - METRIC



SOCKET: 6,7,8,9,10,11,12,13,14,15,16,17,18,19,21,22,24MM
DEEP SOCKET: 10,11,12,13,14,15,16,17,18,19MM
SPARK PLUG SOCKETS: 16,21MM
EXTENSION BARS: 75MM, 150MM
3/8" SQ DRIVE 72 TOOTH FLIP REV. RATCHET
UNIVERSAL JOINT
1/2"SQ DRIVE- 3/8" SQ DRIVE MALE T-BAR ADAPTOR



HAND TOOL - SOCKET SET (CR-V)

HT-4028 1/2"SQ DRIVE SOCKET SET - METRIC



SOCKET: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32MM

SPARK PLUG: 16, 21MM

EXTENSION BARS: 75MM, 125MM, 250MM

1/2"SQ DRIVE 72 TOOTH FLIP REVERSE RATCHET WRENCH
UNIVERSAL JOINT

1/2"SQ DRIVE - 3/8"SQ DRIVE MALE T-BAR ADAPTOR

HT-2343 3PC 1/4", 3/8", 1/2" SQ DRIVE RATCHET SET



1/4"SQ DRIVE RATCHET

3/8"SQ DRIVE RATCHET

1/2"SQ DRIVE RATCHET

HT-3005 5PC 3/8" SQ DRIVE RATCHET SET



STUBBY RATCHET

STANDARD RATCHET

EXTENEND RATCHET

FLEX RATCHET

PALM RATCHET

NO. 483 SEC.1, SANRONG ROAD, WURI TOWNSHIP, TAICHUNG 414, TAIWAN

TEL: 886-4- 23363668 FAX: 886-4-23103706

EMAIL: christine@emaxpowers.com



TNT MANUFACTURING CO., LTD.

PNEUMATIC CHAMFER TOOL

Product Feature

*** EMAX Pneumatic chamfering tool**

This tool operates with two disposable indexable inserts and can chamfer straight and curved edges and hold edges on mild steel products such as machined parts and olds.

*** Compact and lightweight model enhances operator's productivity.**

The downsized guide plate enables an operator to perform chamfering work in confined areas.

*** A newly developed energy-saving and high efficient motor provides high output power
low air consumption**

*** The long life motor is cost - effective in maintenance**

*** Easy replacement of indexable insert**



ITEM NO.	FREE SPEED	AIR CONSUMPTION	TOOL SIZE	AIR EXHAUST	OVERALL LENGTH
AT-5216	28000 RPM	2 CFM	105 X 64mm	REAR	105 MM

NO. 483 SEC.1, SANRONG ROAD, WURI TOWNSHIP, TAICHUNG 414, TAIWAN

TEL: 886-4- 23363668 FAX: 886-4-23103706

EMAIL: christine@emaxpowers.com

1. How to use

- Hold the tool firmly, release the lock lever, and depress the throttle lever to start the tool.
- Place the Guide Plate on the workpiece, and slowly pull the tool towards you or push it forward to introduce the indexable inserts to the material.
- While chamfering the inner hole holding the Guide Bearing against the workpiece, move the tool in a clockwise motion. (Fig.1)
- While chamfering the outer diameter holding the Guide Bearing against the workpiece, move the tool in a Counterclockwise motion. (Fig.2)

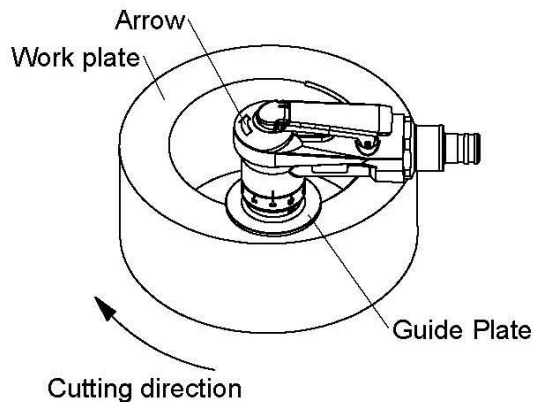


Fig.1

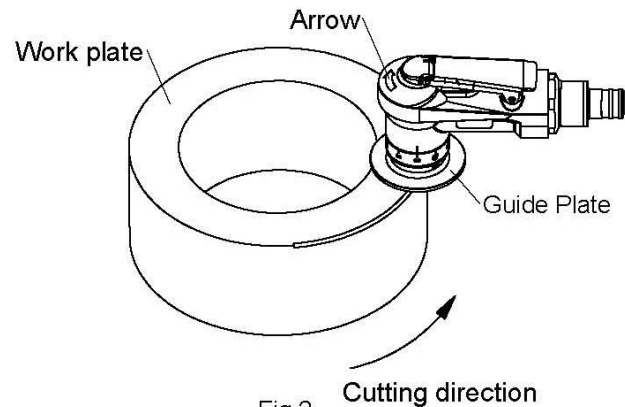


Fig.2

2. How to Replace Indexable Inserts

- Loosen two Hex. Socket Set Screws on the Guide Plate with the accessory Hex. Socket Screw Key. (Fig.3)
- Unscrew the Guide Plate and loosen the Indexable Insert Set Screw with the accessory Spanner T-6F (Fig.4)
- Install the new Indexable Insert (or the indexable insert rotated to a fresh edge) making sure it is in the correct direction and tighten them with the Indexable Insert Set Screw.
- Also replace the other Indexable Insert in order of the above (2) and (3).
- Install the Guide Plate, adjust the indexable insert for the desired chamfering amount, and tighten the two Hex. Socket Set Screws.

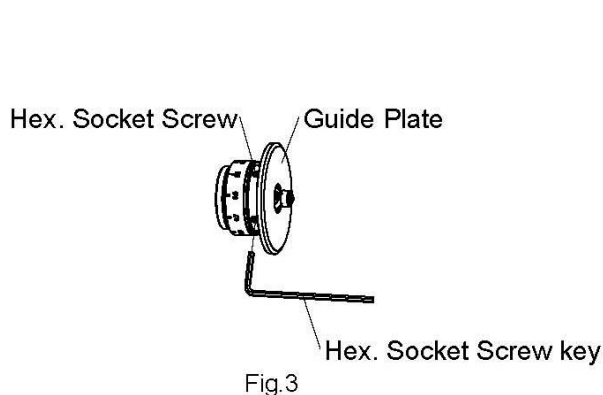


Fig.3

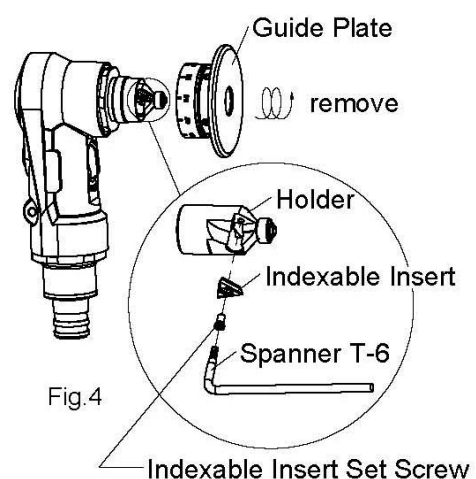


Fig.4



TNT MANUFACTURING CO., LTD

CERTIFIED CORDLESS SCREWDRIVER

According to ISO 5393, VDI/VDE 2647

Product Feature

CLUTCH	Two - phase clutch design for higher CMK One million cycle Maintenance free
MOTOR	DC Brushless New patented motor accelerator for better performance and efficiency
PCB BOARD	Trouble shooting display
ERGONOMICS	Anti-slip LED light Balanced tool
BATTERY	LI-ION 10.8V / 4.0 Ah Powersaving mode



EVOLUTION SERIES FOR INDUSTRIAL USE (1/4" HEX 6.35MM)

MODEL NO.	TORQUE RANGE	SPEED	VOLTAGE	WEIGHT	CMK VALUE
CL-051500	1.0-5.0 NM	320-1500 R.P.M	10.8 V	1.30 Kg	CMK > 2.2+-10%
CL-061200	1.0-6.0 NM	320-1200 R.P.M	10.8 V	1.30 Kg	CMK > 2.2+-10%
CL-080850	1.5-8.0 NM	120-850 R.P.M	10.8 V	1.30 Kg	CMK > 2.2+-10%
CL-120300	1.5-12.0 NM	120-300 R.P.M	10.8 V	1.30 Kg	CMK > 2.2+-10%
CL-120400	2.0-12.0 NM	110-400 R.P.M	10.8 V	1.30 Kg	CMK > 2.2+-10%
CL-140300	2.0-14.0 NM	110-300 R.P.M	10.8 V	1.30 Kg	CMK > 2.2+-10%
CL-090900	1.5-9.0 NM	120-900 R.P.M	10.8 V	1.30 Kg	CMK > 2.5+-10%
CL-120750	2.0-12.0 NM	110-750 R.P.M	10.8 V	1.30 Kg	CMK > 2.5+-10%

NO. 483 SEC.1, SANRONG ROAD, WURI TOWNSHIP, TAICHUNG 414, TAIWAN

TEL: 886-4- 23363668 FAX: 886-4-23103706

EMAIL: christine@emaxpowers.com



1/2" COMPOSITE IMPACT WRENCH

Breakaway Torque
1450 ft-lb (2000 Nm)

RUGGED FRONT COVER

- Aluminum metal for durability
- W/ Twin Hammer inside

COMPOSITE HOUSING

- For light weight
- 4.40 lbs. (2 kg)

ONE HAND F/R SWITCH

- Push button design

OVERMOLD VALVE

- Patent Pending design
- Enhance durability

F/R 3 TORQUE SETTINGS

- Easy rotate in both directions

ERGONOMICS HANDLE

- Over-molded rubber handle
- Reduce operating fatigue



Model	Length	Weight	Speed	Working Torque		Max. Torque		Avg. Air Consumption
AT-5146TB	7.1 in. 181 mm	4.4 lbs. 2.0 kg	7,500 RPM	700 ft-lb	950 Nm	830 ft-lb	1,130 Nm	4.8 cfm 136 l/min



TNT MANUFACTURING CO., LTD