



1/2" EXTREME IMPACT WRENCH

The motor uses **Unique design**
Increase **25% performance output**.

Blade auxiliary spring

1. Spring material **Stainless steel (304)**.
2. Rotor customized spring holder.
3. 100% can be started in a low pressure environment

**This design ensure maximum and fast motor HP
and torque build-up
and prevention of the rotor blades sticking.**



Competitive price .



- ▶ ITEM NO. : AT-5141A
- ▶ 1/2"DR. EXTREME COMPOSITE IMPACT WRENCH-LEVER TYPE
- ▶ 3 Speed Setting
- ▶ FREE SPEED: 8500 RPM
- ▶ MAX FORWARD TORQUE: 1200 FT-LB (1627Nm within 8 second)
- ▶ NET WEIGHT: 1.65KGS
- ▶ LENGTH: 179MM
- ▶ AIR INLET: 1/4"
- ▶ AIR HOSE: 3/8"
- ▶ AIR CONSUMPTION: 5.5CFM (158L/MIN)
- ▶ Suggest Air compressor Horse power: above 3 HP




TORQUE TESTING GRAPHIC

3 SPEED FORWARD SETTING

AT-5141 TESTING

FORWARD (NM)

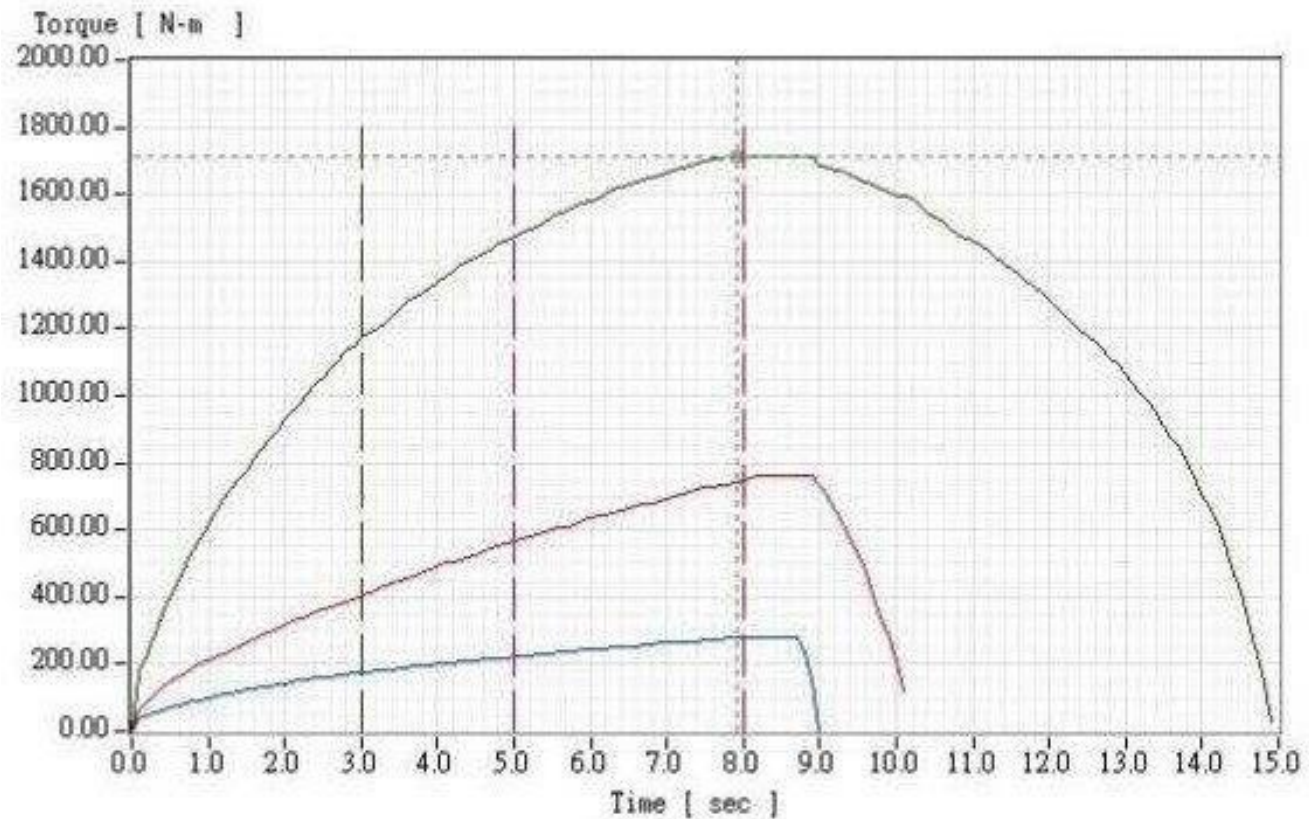

The motor uses **Unique design**
Increase 25% performance output .

Blade auxiliary spring

1. Spring material **Stainless steel (304)**.
2. Rotor customized spring holder.
3. 100% can be started in a low pressure environmer

This design ensure maximum and fast motor HP
and torque build-up
and prevention of the rotor blades sticking.



Competitive price .



V.S



HAZET Twin Turbo technology

high torques with
compact design
Innovative 8-blade
air motor with 25% higher
impact performance
ensures maximum torques

| Model No. | AT-5141 1/2" Exterme Impact Wrench | 9012TT 1/2" Twin Turbo impact wrench | AT-1047 1" Exterme Impact Wrench | 9013TT 1" Twin Turbo impact wrench |
|--------------------------|---|--|--|--|
| Tool Image |  |  |  |  |
| Impact Type | Twin Hammer | Twin Hammer | Twin Hammer | Twin Hammer |
| Anvil Size | 1/2 inch | 1/2 inch | 1 inch | 1 inch |
| Free Speed | 8,500 rpm | 8,300 rpm | 6,000 rpm | 5,200 rpm |
| Recommended torque | 1,350 Nm | 948 Nm | 1,830 Nm | 1,890 Nm |
| Tightening torque max | 1,627 Nm | 1,356 Nm | 2,170 Nm | 2,170 Nm |
| Maximum loosening torque | 2,237 Nm | 2,200 Nm | 4,100 Nm | 4,100 Nm |
| Net weight | 1.6 kg | 1.6 kg | 3.2 kg | 4.5 kg |




► TYRE INFLATOR





3-FUNCTION TIRE GAUGE

- Item No. : AA-6009
- 3-FUNCTION TIRE GAUGE
- Diaphragm Pressure Gauge 3.5"
- Body ZINC & TPR
- Air Inlet: 1/4" Female
- Operating Pressure: 90 PSI.
- Air Flow 1.6 CFM at 100 PSI.
- Fill Air. (inflation)/Release Air. (deflating)/
- Gauge Pressur
- Gauge:Rubber Protected 3.5
- Measures pressure range:0-220 PSI, 0-15 Bar, 0-15 kg/cm2,
- 0-1500 Kpa
- Air Flow at 100 PSI.: 12CFM
- Hose length:76 cm with spring cover
- Suggest Air compressor Horse power: above 2 HP





3 FUNCTION TIRE GAUGE

► USA & EUROPE PATENT

- Item No. : AA-6008
- 3 FUNCTION TIRE GAUGE
- 3.5" GAUGE
- BODY GUN: ZIN & TPR
- AIR INLET: 1/4" FEMALE (AIR INLET WITH 20 MESH SCREEN)
- OPERATING PRESSURE: 90 PSI
- AIR FLOW: 1.1 CFM AT 100 PSI
- FUNCTION: FILL AIR, RELEASE AIR, GAUGE PRESSURE
- GAUGE: 3.5" RUBBER HOSE PROTECTION
- 0-220 PSI <lb/cm²> 0 - 15 Bar <kg/cm²> 0-1,500 kpa
- 50 cm Hose Rotation & 360 Degree Dual Chuck.
- HOSE LENGTH: 50MM
- Suggest Air compressor Horse power: above 2 HP

